

Abmessungen
Dimensions (mm)

Gewicht
Weigth

| Typ /Type | Laufrolle Track roller | L | B | H | H1 | t4 | t5 | G4 | Hw | [kg] |
|-----------|---------------------------|-----|-----|------|------|----|----|-----|------|------|
| SMLFL-20 | LFR50/5-4 KDD | 50 | 55 | 22 | 20,5 | 38 | 40 | M5 | 9 | 0,16 |
| SMLFL-25 | LFR50/5-6 KDD | 75 | 64 | 25 | 21,9 | 60 | 50 | M5 | 10,4 | 0,35 |
| SMLFL-32 | LFR50/8-6 KDD | 90 | 80 | 35,5 | 30 | 70 | 59 | M8 | 14 | 0,40 |
| SMLFL-52 | LFR5201-10 KDD | 100 | 120 | 54,3 | 43,2 | 70 | 90 | M10 | 19,5 | 1,00 |

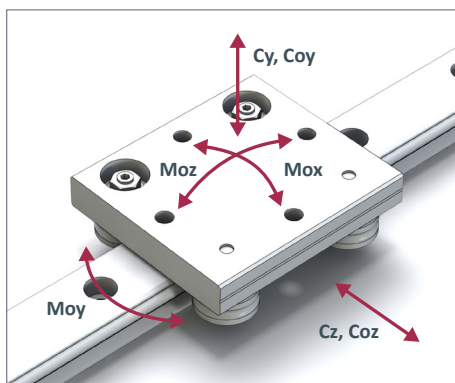


Bild / Fig. 5: Lastrichtungen und Momente / Load directions and moments

Tragfähigkeit / Load capacity

| | Tragzahlen [N] Load ratings [N] | | | | Momente [Nm] Moments [Nm] | | |
|----------|------------------------------------|------|-------|-------|------------------------------|-----|-----|
| | Cy | Coy | Cz | Coz | Mox | Moy | Moz |
| SMLFL-20 | 1330 | 845 | 2300 | 1620 | 7 | 22 | 11 |
| SMLFL-25 | 1330 | 845 | 2300 | 1620 | 8 | 41 | 17 |
| SMLFL-32 | 4210 | 2250 | 7100 | 4300 | 29 | 132 | 70 |
| SMLFL-52 | 10000 | 5120 | 17000 | 10000 | 108 | 300 | 148 |